




BLACKLION
TRUCK & BUS TIRE CATALOG 2018

Long Haul / Regional / On & OFF Road / Off Road / Urban








CONTENTS

08 BF156	09 BT160	10 BLH88	11 BT165	12 BD175	34 BLG19	35 BLR52	36 BW199	37 BD210	38 BD260
13 BD171	14 BD178	15 BLR08	16 BT166	17 BA126	39 BD188	40 BD190	41 BLG70	42 BA115	43 BLR01
18 BA106	19 BD185	20 BD165	21 BT169	22 BF155	44 BA122	45 BA102	46 BD212	47 BLR03	48 BA202
23 BA111	24 BA162	25 BA161	26 BD177	27 BD176	50 BD270	51 BD189	52 BD280	53 BD266	54 BLM16
28 BA124	29 BLG06	30 BT161	31 BA105	32 BA125	56 BD172	57 BD128	58 BLC58		



BLACKLION PATTERN REFERENCE

	Long Haul	Regional	On&Off Road	Off Road	Urban	Winter
Vehicle						
Road						
Steer	08 BF156 09 BT160 10 BLH88 11 BT165 18 BA106	09 BT160 22 BF155 11 BT165 25 BA161 24 BA162	35 BLR52 36 BW199			
Drive	12 BD175 13 BD171 14 BD178 15 BLR08 20 BD165 21 BT169	27 BD176 26 BD177 12 BD175 29 BLG06 21 BT169 28 BA124	37 BD210 38 BD260 39 BD188 40 BD190 41 BLG70 34 BLG19	50 BD270 37 BD210 51 BD189 52 BD280 53 BD266		57 BD128 56 BD172
Trailer	09 BT160 16 BT166 11 BT165	09 BT160 11 BT165	35 BLR52 36 BW199			
All-position	17 BA126 19 BD185	23 BA111 30 BT161 31 BA105 32 BA125 19 BD185	47 BLR03 42 BA115 43 BLR01 44 BA122 45 BA102 48 BA202 46 BD212	54 BLM16	58 BLC58	

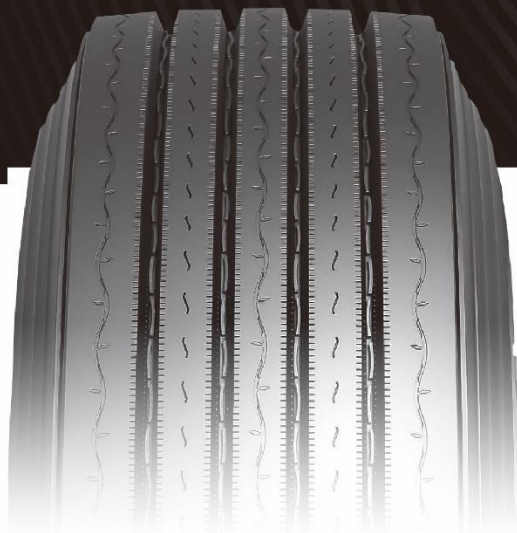

BF156

Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway road



- ☑ High wear resistance
- ☑ Long tread life
- ☑ Economical and green
- ☑ Good cost-performance



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	15.5	L	1054	279
11R22.5	8.25	16	3150	2900	6945	6395	840	840	120	120	148	145	15.5	L	1054	279
11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	15.5	L	1054	279
11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	15.5	L	1104	279
11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	15.5	L	1104	279
285/75R24.5	8.25	14	2800	2575	6175	5675	760	760	110	110	144	141	15.5	L	1050	283
285/75R24.5	8.25	16	3075	2800	6780	6175	830	830	120	120	147	144	15.5	L	1050	283
295/75R22.5	9.00	14	2800	2575	6175	5675	760	760	110	110	144	141	15.5	L	1014	298
295/75R22.5	9.00	16	3000	2725	6610	6005	830	830	120	120	146	143	15.5	L	1014	298

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BT160

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- ☑ Long tread life and great high speed stability
- ☑ Durable and wear-resistant sidewall
- ☑ Cool running
- ☑ Low noise emissions and reduced stone retention



Size	Meas. Rim	PR	Load		Pressure		Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg	lbs	kPa	psi				D	B
385/55R22.5	12.25	18	4250	9370	830	120	158	14.5	L	996	386
385/55R22.5	12.25	20	4500	9920	900	130	160	14.5	K	996	386
385/65R22.5	11.75	20	4500	9920	900	130	160	15.5	K	1072	389
385/65R22.5	11.75	18	4250	9370	830	120	158	15.5	L	1072	389
385/65R22.5	11.75	24	5000	11000	930	135	164	15.5	K	1072	389

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BLH88

Suitable Conditions

Long mileage trucks and passenger busses running on paved roads and highways



- High wear resistance
- Long tread life
- Economical and green
- Good cost-performance



 Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kpa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
10.00R20	7.5	16	3000	2725	6610	6010	830	830	120	120	146	143	14.5	L	1054	278
10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	14.5	K	1054	278
11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	14.5	M	1054	279
11R22.5	8.25	16	3150	2900	6945	6395	840	840	120	120	148	145	14.5	M	1054	279
11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	14.5	M	1054	279
11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	14.5	M	1104	279
11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	14.5	M	1104	279
12R22.5	9.00	14	3000	2725	6610	6010	720	720	105	105	146	143	14.5	M	1085	300
12R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	14.5	L	1085	300
12R22.5	9.00	18	3550	3150	7825	6945	850	850	125	125	152	148	14.5	L	1085	300
285/75R24.5	8.25	14	2800	2575	6175	5675	760	760	110	110	144	141	14.5	M	1050	283
285/75R24.5	8.25	16	3075	2800	6780	6175	830	830	120	120	147	144	14.5	M	1050	283
295/75R22.5	9.00	14	2800	2575	6175	5675	760	760	110	110	144	141	14.5	M	1014	298
295/75R22.5	9.00	16	3000	2725	6610	6005	830	830	120	120	146	143	14.5	M	1014	298
295/80R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	15.5	M	1044	298
295/80R22.5	9.00	18	3550	3350	7825	7390	850	850	125	125	152	150	15.5	M	1044	298
315/80R22.5	9.00	16	3450	3150	7605	6945	760	760	110	110	151	148	14.5	M	1076	312
315/80R22.5	9.00	18	3750	3450	8270	7610	830	830	120	120	154	151	14.5	L	1076	312
315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	14.5	L	1076	312
315/70R22.5	9.00	18	3750	3350	8270	7390	850	850	125	125	154	150	14.5	(M)	1014	312

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BT165

Suitable Conditions

Medium and long mileage trucks running on paved and highway roads



- High wear resistance
- Long tread life
- Economical and green
- Good cost-performance



 Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
12R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	17	L	1085	300
12R22.5	9.00	18	3550	3250	7825	7165	930	930	135	135	152	148	17	L	1085	300
13R22.5	9.75	18	3750	3450	8270	7605	830	830	120	120	154	151	17	K	1124	320
295/60R22.5	9.00	18	3350	3075	7390	6780	900	900	130	130	150	147	14.5	L	926	292
295/80R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	16	M	1044	298
295/80R22.5	9.00	16	3550	3150	7825	6945	850	850	125	125	152	148	16	M	1044	298
295/80R22.5	9.00	18	3550	3250	7825	7165	900	900	130	130	152	149	16	M	1044	298
315/60R22.5	9.75	18	3550	3150	7825	6945	900	900	130	130	152	148	14.5	L	950	313
315/70R22.5	9.00	16	3550	3150	7830	6940	850	850	123	123	152	148	15.5	M	1014	312
315/70R22.5	9.00	18	4000	3350	8820	7385	900	900	130	130	156	150	15.5	L	1014	312
315/70R22.5	9.00	18	3750	3350	8265	7385	900	900	130	130	154	150	15.5	L	1014	312
315/80R22.5	9.00	18	3750	3450	8270	7610	830	830	120	120	154	151	17	L	1076	312
315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	17	L	1076	312

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BD175

Suitable Conditions

Medium and long mileage trucks running on paved and highway roads



- Excellent traction
- High wear resistance
- Tread chunking resistance



BD171

Suitable Conditions

Long mileage vehicles running on paved roads



- Excellent grip
- Excellent durability



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
11R22.5	8.25	16	3000	2725	6610	6010	830	830	120	120	146	143	20	K	1065	279
12R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	20	L	1096	300
12R22.5	9.00	18	3550	3250	7825	7165	930	930	135	135	152	149	20	K	1096	300
295/60R22.5	9.00	18	3350	3075	7390	6780	900	900	130	130	150	147	19	L	932	292
295/80R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	22	M	1050	298
295/80R22.5	9.00	16	3550	3150	7825	6945	850	850	125	125	152	148	22	M	1050	298
295/80R22.5	9.00	18	3550	3250	7825	7165	900	900	130	130	152	149	22	M	1050	298
315/60R22.5	9.75	18	3550	3150	7825	6945	900	900	130	130	152	148	20	L	956	313
315/70R22.5	9.00	16	3550	3150	7830	6940	850	850	123	123	152	148	20	M	1020	312
315/70R22.5	9.00	18	3750	3350	8265	7385	900	900	130	130	154	150	20	L	1020	312
315/70R22.5	9.00	18	4000	3350	8820	7385	900	900	130	130	156	150	20	L	1020	312
315/70R22.5	9.00	18	3750	3350	8265	7385	900	900	130	130	154	150	20	L	1020	312
315/80R22.5	9.00	18	3750	3450	8270	7610	830	830	120	120	154	151	23	L	1082	312
315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	23	L	1082	312

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
11R22.5	8.25	16	3000	2725	6610	6005	830	900	120	120	146	143	24	L	1065	279
11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	24	L	1065	279
11R22.5	8.25	16	3150	2900	6945	6395	840	900	120	120	148	145	24	L	1065	279
11R24.5	8.25	16	3250	3000	7160	6610	830	900	120	120	149	146	24	L	1104	279
11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	24	L	1104	279
285/75R24.5	8.25	14	2800	2575	6175	5675	760	900	110	110	144	141	24	L	1050	283
285/75R24.5	8.25	16	3000	2725	6610	6005	760	760	110	110	146	143	24	L	1050	283
295/75R22.5	9.00	14	2800	2575	6175	5675	760	900	110	110	144	141	24	L	1014	298
295/75R22.5	9.00	16	3000	2725	6610	6005	760	760	110	110	146	143	24	L	1014	298

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BD178

Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads



- Excellent traction
- High wear resistance
- Tread chunking resistance



 Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
315/80R22.5	9.00	18	3750	3450	8270	7160	830	830	120	120	154	151	18	L	312	1082
315/80R22.5	9.00	20	4000	3650	8820	8050	850	850	125	125	156	153	18	L	312	1082

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BLR08

Suitable Conditions

Medium and long mileage trucks running on paved and highway roads



- Excellent grip
- Excellent durability



 Suitable

SIZE	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	23.5	L	1065	279
11R22.5	8.25	16	3150	2900	6945	6395	840	840	120	120	148	145	23.5	L	1065	279
11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	23.5	L	1065	279
11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	23.5	L	1116	279
11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	23.5	L	1116	279
285/75R24.5	8.25	14	2800	2575	6175	5675	760	760	110	110	144	141	23.5	J	1056	283
285/75R24.5	8.25	16	3075	2800	6780	6175	830	830	120	120	147	144	23.5	J	1056	283
295/75R22.5	9.00	14	2800	2575	6175	5675	760	760	110	110	144	141	23.5	K	1020	298
295/75R22.5	9.00	16	3000	2725	6610	6005	830	830	120	120	146	143	23.5	K	1020	298

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BT166

Suitable Conditions

Medium and long mileage trucks running on paved and highway roads



- High wear resistance
- Low noise emissions
- Long tread life
- Cool running



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	9.5	L	1054	279
11R22.5	8.25	16	3150	2900	6945	6395	840	840	120	120	148	145	9.5	L	1054	279
11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	9.5	L	1054	279
11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	9.5	L	1104	279
11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	9.5	L	1104	279
255/70R22.5	7.50	16	2500	2300	5510	5070	830	830	120	120	140	137	9.5	M	930	255
285/75R24.5	8.25	14	2800	2575	6175	5675	760	760	110	110	144	141	9.5	L	1050	283
285/75R24.5	8.25	16	3075	2800	6780	6175	830	830	120	120	147	144	9.5	L	1050	283
295/75R22.5	9.00	14	2800	2575	6175	5675	760	760	110	110	144	141	9.5	L	1014	298
295/75R22.5	9.00	16	3000	2725	6610	6005	830	830	120	120	146	143	9.5	L	1014	298

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BA126

Suitable Conditions

Long mileage vehicles running on paved roads



- Excellent durability
- Cool running
- Tread chunking resistance



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
9.5R17.5	6.75	14	1850	1750	4080	3860	750	750	110	110	129	127	13.5	L	842	240
9.5R17.5	6.75	16	1950	1850	4300	4080	830	830	120	120	131	129	13.5	L	842	240
9.5R17.5	6.75	18	2725	2575	6005	5675	875	875	125	125	143	141	13.5	J	842	240
12R22.5	9.00	18	3550	3150	7825	6945	850	850	125	125	152	148	14.5	L	1085	300
12R22.5	9.00	18	3550	3250	7825	7165	930	930	135	135	152	149	14.5	L	1085	300
215/75R17.5	6.00	14	1650	1500	3640	3310	760	760	110	110	125	122	12	M	767	211
215/75R17.5	6.00	16	2180	2060	4805	4540	865	865	125	125	135	133	12	J	767	211
225/70R19.5	6.75	12	1650	1550	3640	3415	660	660	95	95	125	123	12.5	M	811	226
225/70R19.5	6.75	14	1800	1700	3970	3750	760	760	110	110	128	126	12.5	L	811	226
225/75R17.5	6.75	14	1850	1750	4080	3860	725	725	105	105	129	127	12.5	M	783	226
235/75R17.5	6.75	16	2000	1850	4410	4080	830	830	120	120	132	129	13	M	797	233
235/75R17.5	6.75	18	2725	2575	6005	5675	865	865	125	125	143	141	13	J	797	233
245/70R19.5	7.50	14	2060	1950	4540	4300	760	760	110	110	133	131	13	M	839	248
245/70R19.5	7.50	16	2240	2120	4940	4675	830	830	120	120	136	134	13	M	839	248
255/70R22.5	7.50	16	2500	2300	5510	5070	830	830	120	120	140	137	13	M	930	255
275/70R22.5	8.25	16	2800	2575	6175	5675	830	830	120	120	144	141	14	M	958	276
275/70R22.5	8.25	18	3150	2900	6940	6395	900	900	130	130	148	145	14	M	958	276
315/80R22.5	9.00	18	3750	3450	8270	7610	830	830	120	120	154	151	14.5	L	1076	312
315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	14.5	K	1076	312

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BA106

Suitable Conditions

Medium and long mileage vehicles running on paved roads



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi							
			S	D	S	D	S	D	S	D	S	D			D	B
12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	14.5	K	1226	315

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BD185

Suitable Conditions

Long mileage vehicles running on paved roads



- ✓ Excellent grip
- ✓ Strong braking performance
- ✓ Excellent durability



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi							
			S	D	S	D	S	D	S	D	S	D			D	B
295/80R22.5	9.00	18	3550	7830	6940	3150	850	123	850	123	152	148	21	L	1044	298
295/80R22.5	9.00	18	3550	7825	7165	3250	900	130	900	130	152	149	21	L	1044	298

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BD165

Suitable Conditions

Medium and long mileage vehicles running on paved roads



Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
315/80R22.5	9	18	4000	3350	8820	7385	850	850	123	123	156	150	18	L	1082	312
315/80R22.5	9	18	3750	3450	8270	7610	830	830	120	120	154	151	18	L	1082	312
315/80R22.5	9	20	4000	3650	8820	8050	850	850	120	120	156	153	18	K	1082	312

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BT169

Suitable Conditions

Long mileage trucks running on paved and highway roads



- Excellent durability
- Cool running



Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
385/65R22.5	11.75	18	4250	9370	830	120	389	155	17.5	L	1072	389				
385/65R22.5	11.75	20	4500	9920	900	130	389	157	17.5	K	1072	389				

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BF155

Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads



- High wear resistance
- Long tread life
- Economical and green
- Good cost-performance



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	14.3	L	1054	279
11R22.5	8.25	16	3150	2900	6945	6395	840	840	120	120	148	145	14.5	L	1054	279
11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	14.5	L	1054	279
11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	14.5	L	1104	279
11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	14.5	L	1104	279
12R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	14.3	L	1085	300
215/75R17.5	6.00	14	1700	1600	3750	3525	700	700	100	100	126	124	12.5	M	767	211
215/75R17.5	6.00	16	2180	2060	4805	4540	860	860	125	125	135	133	12.5	L	767	211
285/75R24.5	8.25	14	2800	2575	6175	5675	760	760	110	110	144	141	14.5	L	1050	283
285/75R24.5	8.25	16	3075	2800	6780	6175	830	830	120	120	147	144	14.5	L	1050	283
295/75R22.5	9.00	14	2800	2575	6175	5675	760	760	110	110	144	141	14.5	L	1014	298
295/75R22.5	9.00	16	3000	2725	6610	6005	830	830	120	120	146	143	14.5	L	1014	298
235/75R17.5	6.75	16	2000	1900	4410	4190	760	760	110	110	132	130	13	M	797	233
235/75R17.5	6.75	18	2725	2575	6005	5675	860	860	125	125	143	141	13	L	797	233
315/80R22.5	9.00	18	3750	3450	8270	7610	830	830	120	120	154	151	14.5	L	1076	312
315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	14.5	L	1076	312
ST235/80R16	6 1/2 J	14	1850	1650	4080	3640	760	110	760	110	129	125	8	L	782	235
ST235/85R16	6 1/2 J	12	1800	1600	3970	3525	660	95	660	95	128	124	9	L	806	235

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BA111

Suitable Conditions

Medium and long mileage vehicles running on paved roads



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
7.50R16LT	6.00G	12	1400	1250	3085	2755	670	670	97	97	120	116	12.5	L	805	215
7.50R16LT	6.00G	14	1500	1320	3305	2910	770	770	112	112	122	118	12.5	L	805	215
8.25R16LT	6.50H	14	1700	1500	3750	3310	670	670	97	97	126	120	12.5	L	855	235
8.25R16LT	6.50H	16	1800	1600	3970	3525	770	770	112	112	128	124	12.5	L	855	235

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BA162

Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway road



- High scrub resistance
- Cool running
- Low noise emissions
- Long tread life



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi						D	B
			S	D	S	D	S	D	S	D	S	D			D	B
11.00R20	8	16	3350	3075	7390	6780	830	830	120	120	150	147	18	K	1096	293
11.00R20	8	18	3550	3250	7830	7160	930	930	135	135	152	149	18	K	1096	293
11R22.5	8.25	16	3000	6610	6010	2725	830	120	830	120	146	143	15.5	L	1054	279
1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs																



BA161

Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway road



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi						D	B
			S	D	S	D	S	D	S	D	S	D			D	B
10.00R20	7.5	18	3250	3000	7165	6610	930	930	135	135	149	146	14.5	K	1054	278
1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs																



BD177

Suitable Conditions


Medium and long mileage trucks running on paved and highway roads



 Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
10R22.5	7.50	14	2575	2430	5355	5675	790	115	790	115	141	139	18.5	M	1019	254
11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	20	L	1065	279
11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	20	L	1065	279
11R22.5	8.25	16	3150	2900	6940	6390	850	850	123	123	148	145	20	L	1065	279
11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	20	L	1116	279
11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	20	L	1116	279
255/70R22.5	7.50	16	2500	2300	5510	5070	830	830	120	120	140	137	20	L	930	255

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs

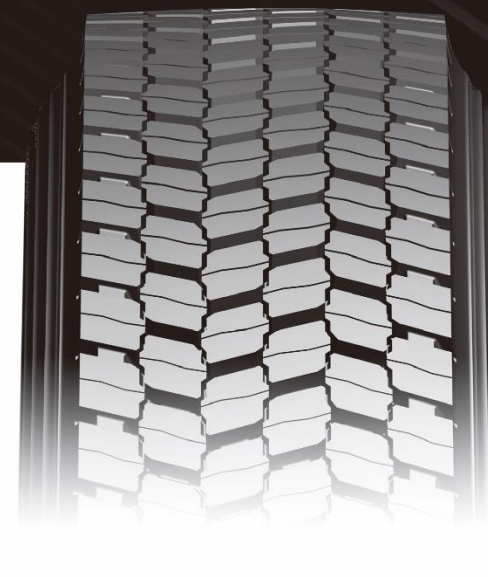

BD176

Suitable Conditions

Medium vehicles running on paved roads



- Excellent grip
- Strong braking traction performance
- Excellent durability



 Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	20.5	M	1065	279
11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	148	145	20.5	M	1065	279
11R22.5	8.25	16	3000	2725	6005	6005	830	830	120	120	146	143	20.5	M	1065	279
11R24.5	8.25	14	3000	2725	6610	6005	720	720	105	105	146	143	20.5	L	1116	279
11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	20.5	L	1116	279
285/75R24.5	8.25	14	2800	2575	6175	5675	760	760	110	110	144	141	20.5	J	1050	283
285/75R24.5	8.25	16	3075	2800	6780	6175	830	830	120	120	147	144	20.5	J	1056	283
295/75R22.5	9.00	16	3000	2725	6610	6005	830	830	120	120	146	143	20.5	J	1020	298
295/75R22.5	9.00	14	2800	2575	6175	5675	760	760	110	110	144	141	20.5	J	1020	298
315/80R22.5	9.00	18	3750	3450	8270	7610	830	830	120	120	154	151	19.5	L	1082	312
315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	19.5	L	1082	312

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BA124

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- ☑ Long tread life and great high speed stability
- ☑ Durable and wear-resistant sidewall
- ☑ Cool running
- ☑ Low noise emissions and reduced stone retention



● Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
265/70R19.5	7.50	16	2500	2360	5510	5205	775	112	775	112	140	138	13.5	M	867	262
265/70R19.5	7.50	18	2725	2575	6005	5675	900	130	900	130	143	141	13.5	J	867	262
285/70R19.5	8.25	16	3000	2800	6610	6175	900	130	900	130	146	144	13	M	895	283
285/70R19.5	8.25	18	3350	3150	7390	6940	900	130	900	130	150	148	13	K	895	283

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BLG06

Suitable Conditions

Medium and long mileage vehicles running on paved and unpaved roads



- ☑ High wear resistance
- ☑ Long tread life
- ☑ Excellent durability



● Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
10.00R20	7.5	16	3000	2725	6610	6010	830	830	120	120	146	143	17.5	K	1065	278
10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	17.5	K	1065	278

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BT161

Suitable Conditions

Medium and long mileage trucks running on paved roads and highways



- High wear resistance
- Low noise emissions
- Long tread life
- Cool running



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	16	K	1085	293
11.00R20	8.0	16	3350	3075	7390	6780	830	830	120	120	150	147	16	K	1085	293

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BA105

Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



- Tread chunking resistance
- Cut resistant



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
12.00R24	8.5	18	4250	3875	9370	8540	830	830	120	120	158	155	16	K	1226	315
12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	16	K	1226	315

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BA125

Suitable Conditions

Medium and long mileage trucks running on paved roads and highways



- High wear resistance
- Low noise emissions
- Long tread life
- Cool running



Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	15	K	1054	278
11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	15.5	K	1085	293
11.00R20	8.0	16	3350	3075	7390	6780	830	830	120	120	150	147	15.5	K	1085	293
12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	16	K	1125	315
12R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	15.5	L	1085	300
12R22.5	9.00	18	3550	3150	7825	6945	850	850	125	125	152	148	15.5	L	1085	300

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs





BLG19

Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



BLR52

Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



- Excellent grip
- Excellent durability
- Tread chunking resistance



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
8.25R16LT	6.50H	14	1700	1500	3750	3310	670	670	97	97	126	122	15.5	K	865	235
8.25R16LT	6.50H	16	1800	1600	3970	3525	770	770	112	112	128	124	15.5	L	865	235
8.25R20	6.5	16	2430	2300	5360	5070	930	930	135	135	139	137	17	K	974	236
9.00R20	7.0	14	2575	2430	5660	5340	790	790	115	115	141	139	18	K	1030	259
9.00R20	7.0	16	2800	2650	6170	5840	900	900	130	130	144	142	18	K	1030	259
9.5R17.5	6.75	18	2725	6005	5675	2575	875	125	875	125	143	141	13.5	K	842	240
10.00R20	7.5	16	3000	2725	6605	6010	830	830	120	120	146	143	19	K	1065	278
10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	19	K	1065	278
12.00R24	8.5	18	4250	3875	9370	8540	830	830	120	120	158	155	20	K	1238	315
12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	20	K	1238	315
265/70R19.5	7.50	18	2725	6005	5675	2575	900	130	900	130	143	141	15	K	867	262

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
385/65R22.5	11.75	18	4250	9370	830	120	158	15.5	L	1072	389					
385/65R22.5	11.75	20	4500	9920	900	130	160	15.5	K	1072	389					
425/65R22.5	12.25	18	4750	10470	760	110	162	15.5	K	1124	422					
425/65R22.5	12.25	20	5150	11400	830	120	165	15.5	K	1124	422					

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BW199

Suitable Conditions

Medium and long mileage vehicles running on paved roads



Size	Meas. Rim	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi					D	B
			S	D	S	D	S	D	S	D					
385/65R22.5	11.75	18	4250	9370	830	120	158	\	16.5	K	1072	389			
385/65R22.5	11.75	20	4500	9920	900	130	160	\	16.5	K	1072	389			
425/65R22.5	12.25	20	5150	11400	830	120	165	\	17.5	K	1124	422			

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BD210

Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



- Excellent traction
- Excellent durability
- Tread chunking resistance



Size	Meas. Rim	PR	Load				Pressure				Load Index	Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)		
			kg		lbs		kPa		psi					D	B	
			S	D	S	D	S	D	S	D						
12R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	20.5	L	1096	300
12R22.5	9.00	18	3550	3250	7825	7165	930	930	135	135	152	149	20.5	K	1096	300
13R22.5	9.75	20	4000	3350	8820	7390	900	900	130	130	156	150	22.5	J	1136	320
315/80R22.5	9.00	18	3750	3450	8270	7610	830	830	120	120	154	151	22	K	1082	312
315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	22	K	1082	312

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BD260

Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



- ☑ Excellent traction
- ☑ Tread chunking resistance
- ☑ Cut resistant



BD188

Suitable Conditions

Medium and long mileage vehicles running on paved roads




Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
7.00R16LT	5.50F	14	1320	1180	2910	2600	770	770	110	110	118	114	14	L	785	200
7.50R16LT	6.00G	14	1500	1320	3310	2910	770	770	110	110	122	118	16	L	815	215
8.25R16LT	6.50H	16	1800	1600	3970	3530	770	770	110	110	128	124	16	L	865	235
8.25R20	6.5	16	2430	2300	5360	5070	930	930	135	135	139	137	17.5	K	974	236

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	25	K	1065	279
11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	25	K	1116	279

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs

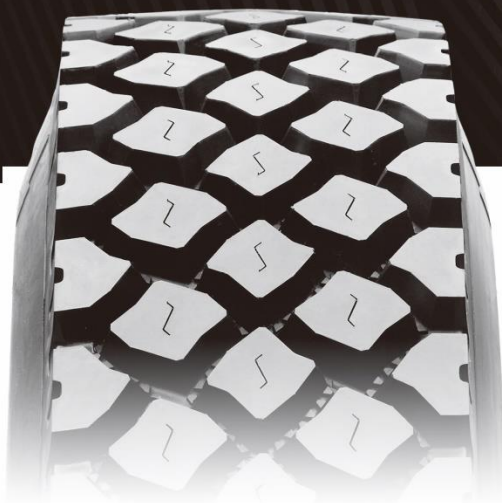

BD190

Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



 Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
11R22.5	8.25	16	3000	6610	6005	2725	830	120	830	120	146	143	25	K	1065	279
11R24.5	8.25	16	3250	7160	6610	3000	830	120	830	120	149	146	25	K	1104	279

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BLG70

Suitable Conditions

Medium and long mileage vehicles running on paved and unpaved roads



- Excellent durability
- Tread chunking resistance



 Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
295/80R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	17.5	L	1050	298
295/80R22.5	9.00	18	3550	3150	7825	6945	850	850	125	125	152	148	17.5	L	1050	298
315/80R22.5	9.00	16	3450	3150	7605	6945	760	760	110	110	151	148	17.5	L	1082	312
315/80R22.5	9.00	18	3750	3450	8270	7610	830	830	120	120	154	151	17.5	L	1082	312
315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	17.5	K	1082	312

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BA115

Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



- Cool running
- Excellent durability



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
7.00R16LT	5.50F	14	1320	1180	2910	2600	770	770	110	110	118	114	12	L	785	200
7.50R16LT	6.00G	14	1500	1320	3310	2910	770	770	110	110	122	118	13	L	815	215
8.25R16LT	6.50H	16	1800	1600	3970	3530	770	770	110	110	128	124	13	L	865	235
8.25R20	6.5	16	2430	2300	5360	5070	930	930	135	135	139	137	14	K	974	236

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BLR01

Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads




- Cool running
- Excellent durability



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
7.00R16LT	5.50F	14	1320	1180	2910	2600	770	770	110	110	118	114	12	L	775	205
7.50R16LT	6.00G	14	1500	1320	3310	2910	770	770	110	110	122	118	12.5	L	805	215
8.25R16LT	6.50H	14	1700	1500	3750	3310	670	670	97	97	126	122	12.5	K	855	235
8.25R16LT	6.50H	16	1800	1600	3970	3530	770	770	110	110	128	124	12.5	L	855	235
9.00R20	7.0	16	2800	2650	6170	5840	900	900	130	130	144	142	15	K	1019	259
10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	16	K	1054	278
11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	16.5	K	1085	293
11.00R20	8.0	16	3350	3075	7390	6780	830	830	120	120	150	147	16.5	K	1085	293
11R22.5	8.25	16	3150	2900	6945	6395	840	840	120	120	148	145	16	M	1054	279
11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	16	M	1054	279
11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	16	M	1054	279
11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	16	M	1104	279
12R22.5	9.00	18	3550	3250	7825	7165	930	930	135	135	152	149	14.3	L	1085	300
12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	17	K	1125	315
12R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	16.5	L	1085	300
13R22.5	9.75	18	3750	3350	8270	7390	850	850	125	125	154	150	16	L	1124	320
295/80R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	17.5	M	1050	298
295/80R22.5	9.00	16	3550	3150	7825	6945	850	850	125	125	152	148	17.5	M	1050	298
295/80R22.5	9.00	18	3550	3250	7825	7165	900	900	130	130	152	149	17.5	L	1050	298
315/80R22.5	9.00	18	3750	3450	8270	7610	830	830	120	120	154	151	16	L	1076	312
315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	16	K	1076	312

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs

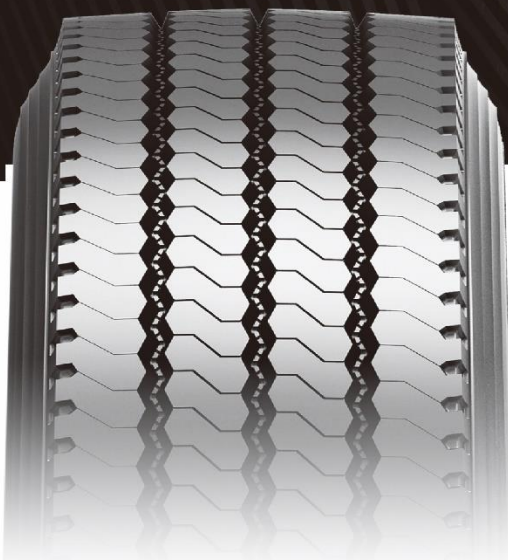

BA122

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- ☑ Excellent durability
- ☑ Cool running
- ☑ Long tread life



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
295/80R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	17.5	M	1044	298
295/80R22.5	9.00	16	3550	3150	7825	6945	850	850	125	125	152	148	17.5	M	1044	298
295/80R22.5	9.00	18	3550	3250	7825	7165	900	900	130	130	152	149	17.5	M	1044	298
315/80R22.5	9.00	18	3750	3450	8270	7610	830	830	120	120	154	151	17	L	1076	312
315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	17	L	1076	312

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BA102


Suitable Conditions

Medium and long mileage vehicles running on paved roads



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
275/70R22.5	8.25	16	3150	2900	6940	6395	900	900	130	130	148	145	17	K	958	276
275/70R22.5	8.25	16	3150	6945	6395	2900	900	130	900	130	148	145	17	K	958	275
275/70R22.5	8.25	18	3150	6940	6395	2900	900	130	900	130	148	145	16.5	K	958	275
275/70R22.5	8.25	18	3150	2900	6940	6395	900	900	130	130	148	145	16.5	K	958	275
315/80R22.5	9.00	20	4625	4125	10200	9090	900	900	130	130	161	157	17	G	1076	312
255/70R22.5	7.50	16	2500	2300	5510	5070	830	830	120	120	140	137	17.5	L	930	255

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs

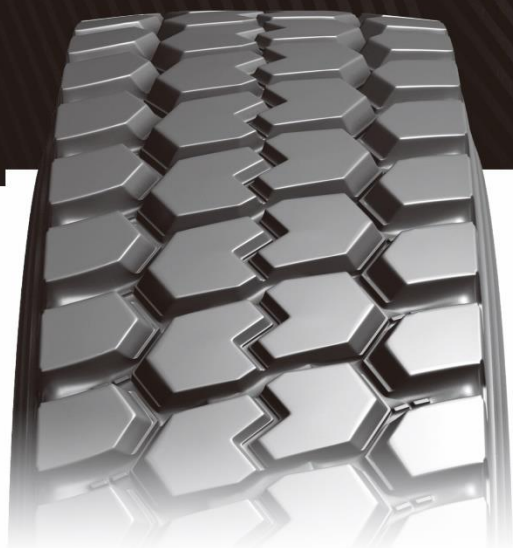

BD212

Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



- Excellent durability
- High strength



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi						D	B
			S	D	S	D	S	D	S	D	S	D				
11.00R20	8.0	16	3350	3075	7390	6780	830	830	120	120	150	147	18	K	1096	293
11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	18	K	1096	293

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BLR03

Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi						D	B
			S	D	S	D	S	D	S	D	S	D				
12.00R24	8.5	18	4250	3875	9370	8540	830	830	120	120	158	155	15.5	K	1226	315
12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	15.5	K	1226	315

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BA202

Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
			kg	lbs	S	D	kPa	psi	S	D	S	D			D	B
6.50R16LT	5.50F	12	1060	925	2340	2040	670	670	97	97	110	105	10.5	L	750	185
11.00R20	8.0	16	3350	3075	7385	6780	830	830	120	120	150	147	17	K	1085	293
11.00R20	8.0	18	3550	3250	7830	7170	930	930	135	135	152	149	17	K	1085	293
295/80R22.5	9.00	18	3550	7830	6940	3150	850	123	850	123	152	148	16	L	1044	298
295/80R22.5	9.00	18	3550	7825	7165	3250	900	130	900	130	152	149	16	L	1044	298

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs





BD270

Suitable Conditions

Short mileage vehicles running on unpaved roads



- Scratch resistant
- Impact resistant
- Excellent durability



 Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
7.50R16LT	6.00G	14	1500	1320	3310	2910	770	770	110	110	122	118	17.5	D	815	215
8.25R16LT	6.50H	16	1800	1600	3970	3530	770	770	110	110	128	124	17.5	D	865	235
8.25R20	6.5	16	2430	2300	5360	5070	930	930	135	135	139	137	19.5	D	974	236

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BD189

Suitable Conditions

Short mileage vehicles running on unpaved roads



 Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
11R22.5	8.25	14	2800	2650	6175	5840	720	720	105	105	144	142	24	G	1065	279
11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	24	G	1065	279
11R22.5	8.25	18	3150	2900	6940	6395	850	850	123	123	148	145	24	G	1065	279
11R24.5	8.25	16	3250	3000	7160	6610	830	830	120	120	149	146	24	G	1116	279
295/80R22.5	9.00	18	3550	3250	7830	7160	900	900	130	130	152	149	24	J	1050	298
295/80R22.5	9.00	16	3350	3075	7390	6780	830	830	120	120	150	147	24	J	1050	298
295/80R22.5	9.00	16	3550	3150	7830	6940	850	850	123	123	152	148	24	J	1050	298

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



BD280

Suitable Conditions

Dump truck tire drive position tire used for medium and short distances on mixed road surfaces



- ✓ Excellent durability
- ✓ High strength
- ✓ Excellent grip



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
315/80R22.5	9.00	18	3750	3350	8270	7390	825	825	120	120	154	150	21	K	1082	312
315/80R22.5	9.00	20	4000	3350	8820	7390	850	850	125	125	156	150	21	K	1082	312
295/80R22.5	9.00	18	3550	7830	6940	3150	850	123	850	123	152	148	18	K	1044	298
295/80R22.5	9.00	18	3550	7825	7165	3250	900	130	900	130	152	149	18	K	1044	298

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BD266

Suitable Conditions

Short mileage vehicles running on unpaved roads



- ✓ Excellent traction
- ✓ Excellent durability
- ✓ High scrub resistance



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
12.00R24	8.5	18	4250	3875	9370	8540	830	830	120	120	158	155	31	D	1226	315
12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	31	D	1226	315

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BLM16

Suitable Conditions

Short mileage vehicles running on unpaved roads



- Excellent traction
- Tread chunking resistance




● Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
10.00R20	7.5	18	3250	3000	7160	6610	930	930	135	135	149	146	21.5	K	1065	278
11.00R20	8.0	18	3550	3250	7830	7160	930	930	135	135	152	149	21.5	K	1096	293
12.00R20	8.5	18	3750	3450	8270	7610	830	830	120	120	154	151	21.5	K	1136	315
12.00R24	8.5	18	4250	3875	9370	8540	830	830	120	120	158	155	21.5	K	1238	315
12.00R24	8.5	20	4500	4125	9920	9090	900	900	130	130	160	157	21.5	K	1238	315
13R22.5	9.75	18	3750	3350	8270	7390	850	850	125	125	154	150	21.5	K	1136	320

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



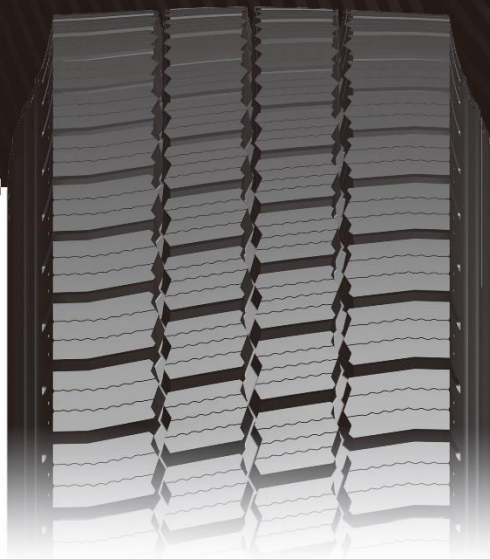


BD172

Suitable Conditions

Running on paved roads in winter weather



- ☑ Improved rigidity, better grip and traction
- ☑ Safer driving experience in winter weather
- ☑ Improving driving ability in winter weather

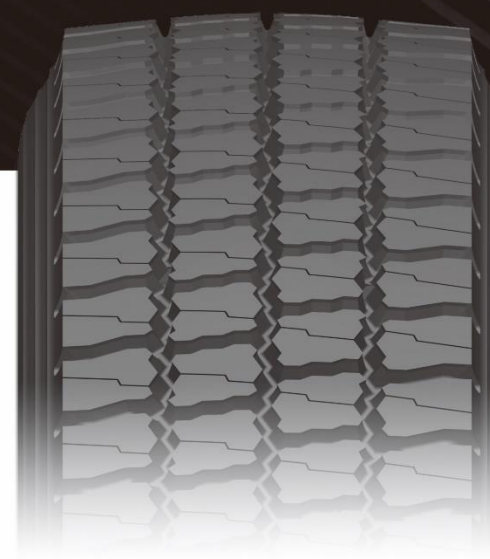

BD128

Suitable Conditions

Running on paved roads in winter weather



- ☑ Effectively improve traction
- ☑ Improving scrubbing resistance
- ☑ Improve driving safety



Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi						D	B
			S	D	S	D	S	D	S	D	S	D			S	D
11R22.5	8.25	16	3000	6610	6005	2725	850	123	850	123	146	143	21.5	L	1065	279
11R24.5	8.25	16	3250	7160	6610	3000	830	120	830	120	149	146	21.5	L	1104	279
11R22.5	8.25	14	2800	6175	5840	2650	720	105	720	105	144	142	21.5	L	1065	279
11R24.5	8.25	14	3000	6610	6005	2725	720	105	720	105	146	143	21.5	L	1104	279

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi						D	B
			S	D	S	D	S	D	S	D	S	D			S	D
225/70R19.5	6.75	14	1800	3970	3750	1700	760	110	760	110	128	124	16	L	817	226
245/70R19.5	7.50	16	2180	4805	4540	2060	860	125	860	125	135	133	16	L	845	248

1inch=25.4mm 1kPa=0.142psi 1KG≈2.2 lbs



BLC58

Suitable Conditions

Short mileage vehicles running on paved roads



- Excellent durability
- High scrub resistance



Suitable

Size	Meas. Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension(mm)	
			kg		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
10R22.5	7.5	16	2800	2650	6175	5840	900	900	130	130	144	142	16.5	L	1019	254

1inch=25.4mm 1kPa=0.142psi 1KG=2.2 lbs



